


***OTOTRAK***





OTOTRAK MODUL  
TIP : YV1  
DC 12V = 0.5 A

**INSTALLATION MANUAL  
(SEA-DOO)**

## HARDWARE INSTALLATION - SEADOO

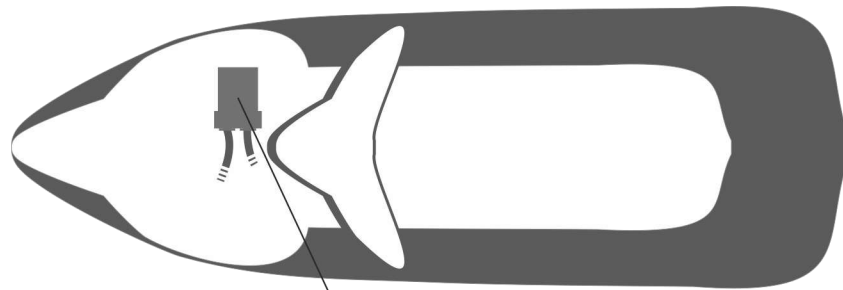

**NOTE:**  
Device gps antenna side indicated by IMEI sticker must be pointed upward/outward in order to work properly.





**NOTE:**  
Remember to apply silicone grease to connectors  
in order to protect them from water.  
**DO NOT** use silicone lubricant spray, or any other  
lubricant at all. Use grease only.







Locate the diagnostic connector, remove the white blank cover and connect Ototrak (picture above).

OTOTRAK D.O.O.  
Trg A. Starčevića 4  
51512 Njivice  
Croatia